



What's inside:




1x Gateway




1x Twist HD Camera




6x Door + Window Sensors




1x Infrared Motion Sensor




1x Fire/CO Siren Extender Sensor



1x Water Leak Sensor



1x External Siren




2x Arm/Disarm/Panic Remotes

Broadband internet connection, iOS or Android phone and home router required. v1.0

Step 1: Connect to Network

Unpack all of your hardware within 20 feet of your home router for quick set up.

1. Connect the 1 Gateway to your router with the included Ethernet cable, then power on.

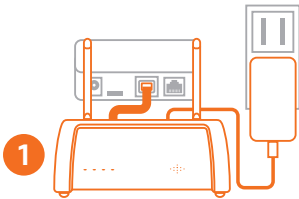


2. Install batteries and plug in power adapters to devices and sensors.



Step 2: Set up your smartphone

1. Go to Wi-Fi settings and connect your smartphone to Wi-Fi.

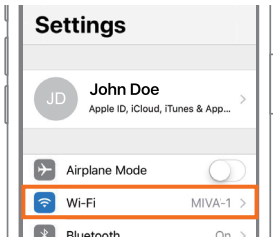

2. Download the Home8 app from the App Store or Google Play Store.




Step 4: Place your devices

Twist HD Camera


Connect the included power adapter to the 2 Camera.

Check the Light indicators, The left light should be Solid blue as power on. The right light should be blink blue if camera connect to Gateway successfully.

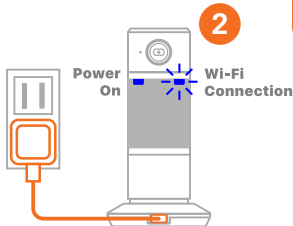


Door + Window Sensor

Use screws or Double-sided tape to attach sensor. Maximum distance between two part is 1/4 inch .

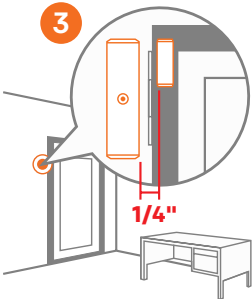


External Siren

Plug the power line. Place the siren.

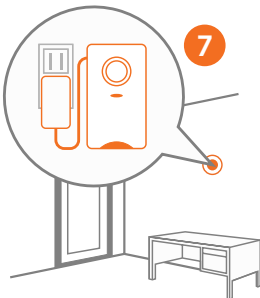


3. Follow the on-screen instructions and set up your account.

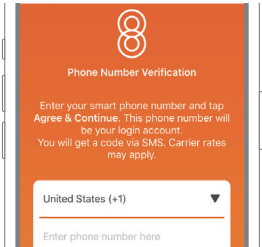

Step 3: Activate your system


1. Select Menu Icon ≡ on top left on the App and tap "Add Device" to activate system.



2. Find the QR Code Sticker on the Gateway and follow the instructions on your app.




3. When you see the "System is ready!" message. Congratulations, your system setup has completed!



Step 4: Place your devices

Infrared Motion Sensor

Place the device in an area with no direct sunlight. The motion sensor has a 3 minutes cooldown period.

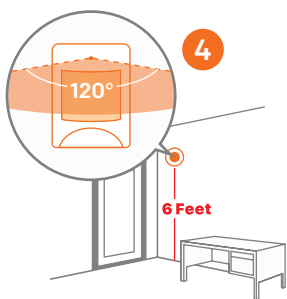

Place your Water Leak Sensor


Ensure the water contact prongs are placed on the surface to detect water leakage. Secure the water contact prongs to the surface. Apply the double-sided tape on the sensor and mount it safely away from the water contact prongs.



Place Your Fire/CO Siren Extender Sensor

Test the device by pressing and holding the **TEST** button for 3 seconds. The LED light should blink.


If you receive a push notification saying "**sonic detected**", it's within range. Mount your device within 1 foot or 30cm to your existing Smoke/CO detector.

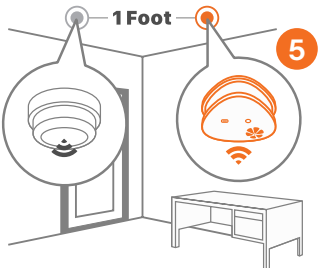

Use your Keychain Remote to Arm/Disarm/Panic


Press the Arm/Disarm button. The LED light should blink. You will receive a push notification on your phone saying "System is armed/disarmed by keychain remote" if remote is within range.

Hold either button for 5 seconds as trigger Panic button.

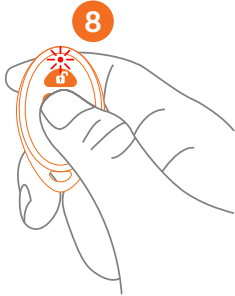


Step 5: Enable your service


1. On the home screen, tap the **Subscribe Now**.

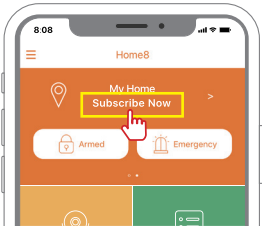


Once your subscription is successful, the system status will change to "**Practice Mode**" for one day.

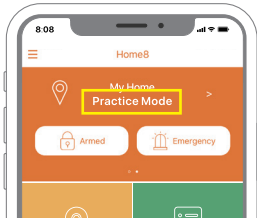

2. Provide contact and payment method information.

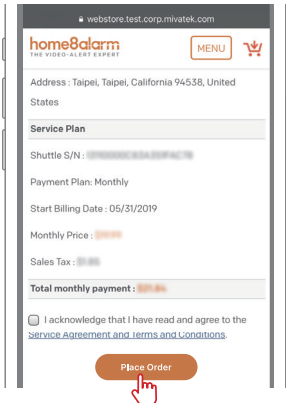

With our Professional Monitoring Service, after the 1-Day Practice Period, the system status will change to "**In Service**", you'll receive 24/7 monitoring for your system.

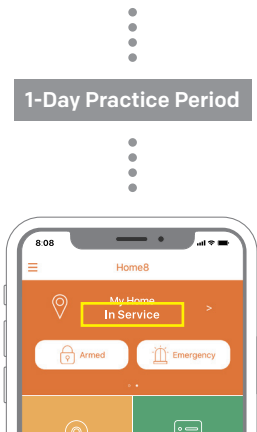

3. Review order information and click **Place Order**.

Troubleshooting & FAQ

Please visit <https://www.home8alarm.com/faq/> or call 1-844-800-6482 for more information.