

# home8

## Wi-Fi 3-in-1 Trio Sensor Add-on Device Quickstart Guide

Model No. WTS3100

### What's inside:



**1 x Wi-Fi 3-in-1 Trio Sensor**



7 x Double-sided  
Tapes



4 x Mounting  
Screws




1 x Battery  
(CR123A)

All Home8 add-on devices have to work with Home8 systems.

## Stap 1: Apparaat en accessoires gereedmaken voor gebruik


1. Haal het apparaat en de accessoires uit de verpakking.
2. Verbind het apparaat met de Centrale Module op een afstand van 0,5 - 3m en controleer of de verbinding goed werkt.
3. Verwijder de zwarte strip op de achterzijde van het apparaat om de accu te laten werken. De LED zal even rood oplichten.

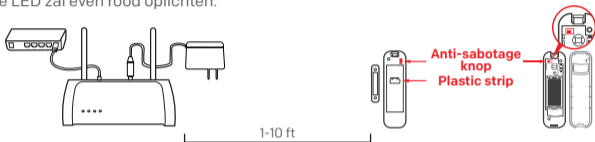

## Stap 2: Voeg een apparaat toe

1. Open de Home8 app en kies uit de menulijst " ≡ " aan de zijkant " Apparaatbeheer ".
2. Druk op de toevoegen (" + ") knop naast de sensor-lijst.
3. Volg de instructies in de App om de QR-code te scannen op het apparaat.

Opmerking: Als de scan voltooid is moet u het serienummer (SN) van het apparaat invoeren.



### Stap 3: Monteer het apparaat

Controleer voordat u het apparaat monteert of deze zich binnen het bereik van de Centrale Module bevindt.

1. Breng het apparaat in de ruimte waar u deze wilt gebruiken.
2. Test het apparaat door 5 seconden op de anti-sabotage knop te drukken en die dan los te laten. Als u een melding krijgt dat de sensor een signaal detecteert is de sensor binnen het bereik van de Centrale module. Monteer het apparaat met de meegeleverde dubbelzijdige tapes.
3. Nu kiest u voor "Energy" om uw apparaat in te stellen.

Voor een goede werking raden wij aan om de sensor naar een open ruimte te richten.



- Voor een goed contact is het nodig om de uiteinden van de twee delen uit te lijnen en in verticale stand te monteren.
- De aanbevolen hoogte is ongeveer 2 meter.
- Richt het apparaat niet op ramen, zonlicht en een hittebron, zoals bijvoorbeeld een kachel.

### **How can I backup recorded video?**

You can backup your recorded video by using any of the following methods.

- By setting automatic backup to Dropbox. (Dropbox account needed)
- By sharing your recorded video from VideoGram to your appointed method.

### **How do I retrieve my Home8 Mobile app password?**

Go to the sign-in page of your Home8 app and tap "Forgot password?". Follow the instruction on screen to enter your phone number. You will then receive an access code via SMS. After input an Access Code that app requested, you can then reset the password by yourself. You will also receive a confirmation email after successfully reset your password.

### **How can I be certain my personal information is secured?**

Our first level of security is authentication and your password is encrypted when you sign in to your account. At the next level where all data is transmitted, including videos, images, as well account information, bank-level AES data encryption is used.

### **How can I be sure unauthorized people are unable to look at my videos on the cloud?**

With your privacy in mind, all data is encrypted with bank-level security, and each user has his/her own account to access the video. Our system alerts you and your authorized users when it detects login attempts from unauthorized smart devices.

### **How many locations can I manage from my Home8 app?**

Home8 app is built to support multi-location management. You can manage as many locations as you would like, and we do not place a limit on the number of Home8 Systems you can purchase.

### **If I lose my smart device, what should I do to protect my Home8 account?**

We recommend you to change your password as soon as possible by using other smart device with Home8 App installed to sign in to your account to make the change to your password. Alternatively, you may also contact us to disable your account for you.

### **Is there a place I can view the user manual online?**

Yes, visit [www.home8alarm.com/faq](http://www.home8alarm.com/faq), and then access user manuals.

### **What are the requirements prior to purchasing an Home8 System?**

Because Home8 System is a fully IoT interactive system, it will require the following:

- Broadband Internet connection. (dial-up connections are not supported)
- DHCP-enabled router with an available LAN port.
- Smart devices with internet connection.

### **What can I do if a camera is offline?**

If a camera is showing as "offline", try power cycle on the camera first and wait approximately two minutes, if the offline situation persists, try moving the camera closer to the Security Shuttle and power cycle the device again. After tried the methods above, if the offline status is still not resolved, please contact our Technical Support for further troubleshooting assistance.

### **What can I do if my system is offline?**

First, try checking your internet connection, if the connection is working properly, then unplug the network cable from your Security Shuttle for 10 seconds, and then reconnect it. If the Security Shuttle is still offline after 5 minutes, please contact our Technical Support for further troubleshooting assistance.

# Troubleshooting Tips

## Are your devices listed in your app?

If you're having trouble installing your devices, see if they're listed in your Home8 app:

- Navigate to ☰ > **Device Management** to see if all your devices are listed
- Tap + next to the device category and follow the on-screen instructions to add any missing devices

## Are your devices communicating with Security Shuttle?

- If your devices don't connect to Security Shuttle, they might be too far away. Take them to a location that's closer to Security Shuttle and try again.
- If they do connect, you'll know the range of your device and where to install a range extender.
- Alternatively, you can move Security Shuttle closer to your device.
- If your devices still don't communicate with Security Shuttle, even when they're in the same room, navigate to ☰ > **Device Management** > + on the Home8 app to add your devices again.

## Do you need to reset your sensor?

If your device isn't communicating with the Security Shuttle, your app may ask you to reset your device.

- Open the front cover of the sensor.
- Remove the battery and insert again.
- Press the tamper switch four times within 1.5 seconds and during the 4<sup>th</sup> press, hold the tamper switch until the LED lights up. After 3 seconds the LED will turn OFF, and after the next 2 seconds, release the tamper switch. If reset successfully, the LED will light on for 1 second. Otherwise, the LED will flash once.
- Return to the app and follow the onscreen instructions.

## Need help installing your Home8 system?

<http://www.home8alarm.com/faq>  
[support-global@home8systems.com](mailto:support-global@home8systems.com)