


What's inside:



1x Gateway



1x Power Adapter

1x Ethernet Cable




1x RF433 Dongle



L-shaped USB Adapter



2x Door + Window Sensors



2x Batteries (CR123A)



4x Double-Sided Tapes



1x External Siren



1x Infrared Motion Sensor




2x Arm/Disarm/Panic Remotes



6x Mounting Accessories



1x Battery (CR123A)



1x Double-Sided Tape



1x Double-Sided Tape


Broadband internet connection, iOS or Android phone and home router required.

V1.0


Step 1: Connect to Network

Unpack all of your hardware within 20 feet of your home router for quick set up.

1. Plug in the **2 RF433 Dongle** to the Gateway with the included **L-shaped USB adapter** for best reception standing up.



2. Connect the **1 Gateway** to your router with the included Ethernet cable, then power on.




3. Install batteries and plug in power adapters to devices and sensors.



Step 2: Set up your smartphone


1. Go to Wi-Fi settings and connect your smartphone to Wi-Fi.



2. Download the **Home8 app** from the App Store or Google Play Store.




3. Follow the on-screen instructions and set up your account.



Step 3: Activate your system


1. Select **Menu Icon** ≡ on top left on the App and tap **"Add Device"** to activate system.



2. Find the QR Code Sticker on the Gateway and follow the instructions on your app.



3. When you see the **"System is ready!"** message. Congratulations, your system setup has completed!




Step 4: Place your devices

Door + Window Sensor

Use screws or Double-sided tape to attach sensor.


Maximum distance between two part is 1/4 inch .



Infrared Motion Sensor


Place the device in an area with no direct sunlight.

The motion sensor has a 3 minutes cooldown period.



External Siren

Plug the power line.
Place the siren.




Use your Keychain Remote to Arm/Disarm/Panic

Press the Arm/Disarm button.
The LED light should blink.


You will receive a push notification on your phone saying "System is armed/disarmed by keychain remote" if remote is within range.

Hold either button for 5 seconds as trigger Panic button.




Step 5: Enable your service

1. On the home screen, tap the **Subscribe Now**.




Once your subscription is successful, the system status will change to "**Practice Mode**" for one day.




1-Day Practice Period

2. Provide contact and payment method information.

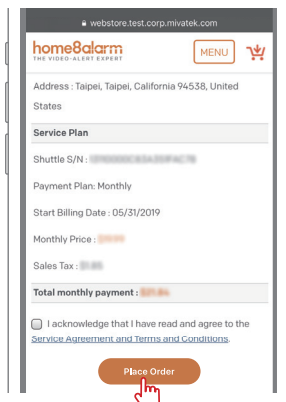

With our Professional Monitoring Service, after the 1-Day Practice Period, the system status will change to "**In Service**", you'll receive 24/7 monitoring for your system.



3. Review order information and click **Place Order**.

Troubleshooting & FAQ

Please visit <https://www.home8alarm.com/faq/> or call 1-844-800-6482 for more information.