


# home8

## Wi-Fi 3-in-1 Trio Sensor Add-on Device Quickstart Guide

Model No. WTS3100

### What's inside:



### 1 x Wi-Fi 3-in-1 Trio Sensor



7 x Double-sided  
Tapes



4 x Mounting  
Screws



1 x Battery  
(CR123A)

### Need help installing your Home8 system?

Visit our FAQ page: <http://www.home8alarm.com/faq/>


User Manuals: <http://www.home8alarm.com/manuals/>

Email us: [support@home8alarm.com](mailto:support@home8alarm.com)

All Home8 add-on devices have to work with Home8 systems

## Step 1: Assemble your device and accessories

1. Unpack your device and accessories.
2. Pair the device with the Security Shuttle within 1-10 feet to make sure the connection is working well.
3. Pull and remove the black plastic strip in the back of the device to initiate battery contact. The LED will flash red for a second.

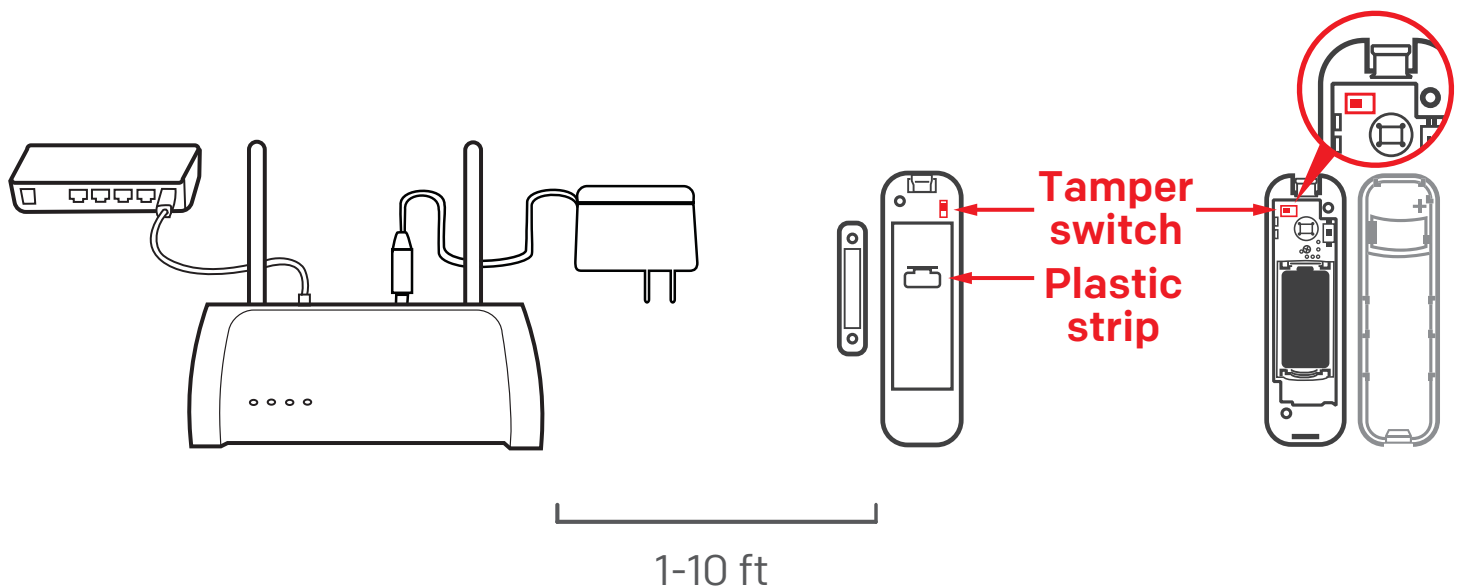

## Do you need to reset your sensor?

If your device isn't communicating with the Security Shuttle, your app may ask you to reset your device.




- Open the front cover of the sensor.
- Remove the battery and insert again.
- Press the tamper switch four times within 1.5 seconds and during the 4<sup>th</sup> press, hold the tamper switch until the LED lights up. After 3 seconds the LED will turn OFF, and after the next 2 seconds, release the tamper switch. If reset successfully, the LED will light on for 1 second. Otherwise, the LED will flash once.
- Return to the app and follow the onscreen instructions.

## Step 2: Add a device

---

1. Open the Home8 app, tap on the the menu button " ≡ " and select "Add Device".
2. Find QR Code on the device and follow instruction.
3. If you have multiple systems, select the location where you would like to add the device .

Note: If the scan is incomplete, you will be asked to enter the serial number (SN) of the device.

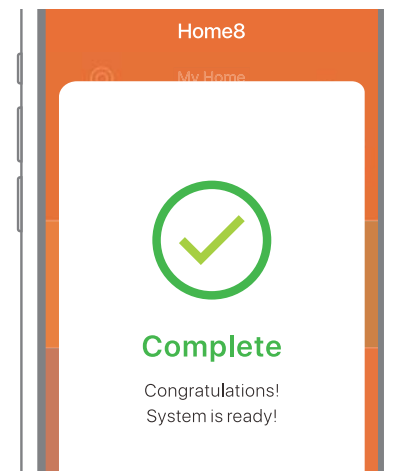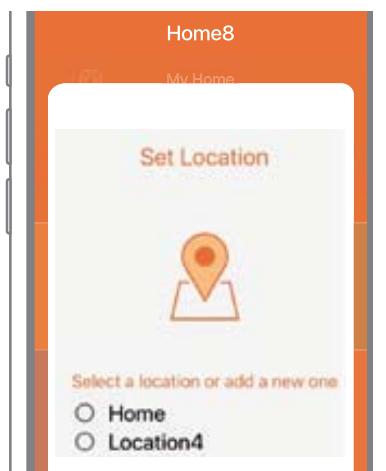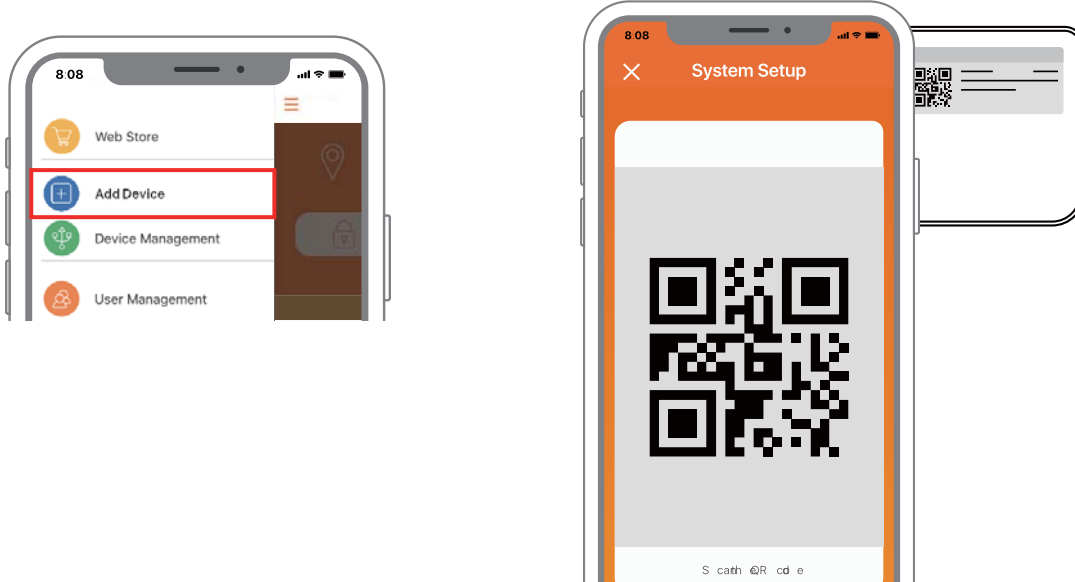

## Step 3: Mount your device

Before you mount your device, see if it's within the Security Shuttle's range.

1. Take your device to the room you want to use it in.
2. Test the device by pressing the tamper switch for 5 seconds and then release it. If you get a notification that says your device has been tampered with, it's within range. Mount the device with the included double-sided tapes.
3. Now you can go to the "**Energy**" tile to set up your device.

For the best performance we recommend to face the sensor towards an open area.

To create proper contact, ensure the tops of the two pieces line up and be mounted in a vertical/upright position. The recommended mounting height is 6.6 ft (2M). Don't let the device face a window or sunlight. Don't let the device face a source of heat. For example : a heater.

